


PLAN VIEW

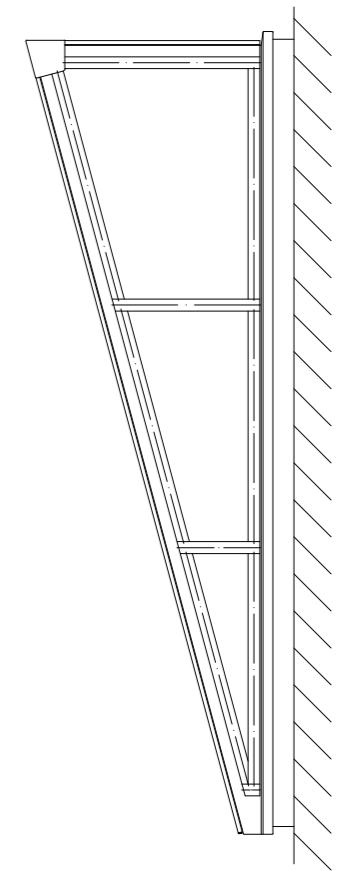

END ELEVATION

GLAZING SPECIFICATION:
 OUTER SKIN: 6mm CLEAR TOUGHENED GLASS
 CAVITY: 16mm ARGON FILLED
 INNER SKIN: 6.8mm CLEAR LAMINATED GLASS
 WITH LOW-E COATING

DESIGN LOAD: 750 N/m²

SPAN RANGE 3500 TO 4200

THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM ROOFGLAZE LIMITED.	CHECKED	TOLERANCE UNLESS OTHERWISE STATED ±3	MATERIAL ALUMINIUM GLASS							Roofglaze Limited, 30-32 Little End Road, Eaton Socon, St Neots, Cambs, PE19 8JH Telephone 01480 474797. Fax 01480 474774. E-mail technical@roofglaze.co.uk	ROOFGLAZE		
	DATE	DIMENSIONS IN MM	FINISH POLYESTER POWDER COATING									TITLE: RG-120 NORTHLIGHT 15 - 90 STYLE	QUOTE N°: A1
	DRAWN R. PADDICK	SCALE 1:20 @ A1										DRAWING N°: RG-120-80	SHEET 1 OF 3
DATE 4-Apr-2011				REV	AMENDMENTS	SIGNED	CHECKED	DATE					