


PLAN VIEW

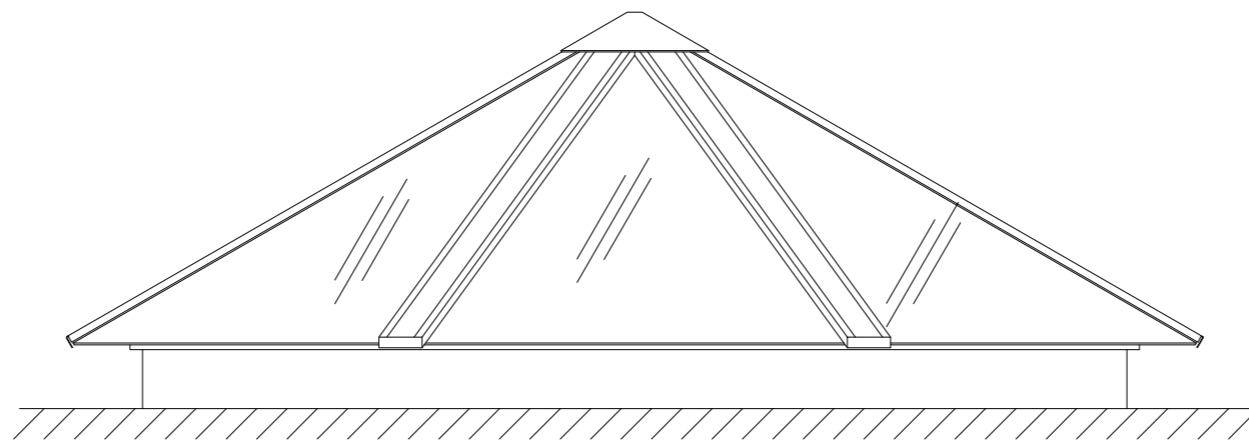

ELEVATION

GLAZING SPECIFICATION:
 OUTER SKIN: 4mm CLEAR TOUGHENED GLASS
 CAVITY: 16mm ARGON FILLED
 INNER SKIN: 6.8mm CLEAR LAMINATED GLASS
 WITH LOW-E COATING

DESIGN LOAD 750 N/m²

THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM ROOFGLAZE LIMITED.	CHECKED	TOLERANCE UNLESS OTHERWISE STATED ±3	MATERIAL ALUMINIUM GLASS						Roofglaze Limited, 30-32 Little End Road, Eaton Socon, St Neots, Cambs, PE19 8JH Telephone 01480 474797. Fax 01480 474774. E-mail technical@roofglaze.co.uk	ROOFGLAZE		
	DATE	DIMENSIONS IN MM	FINISH POLYESTER POWDER COATING									
	DRAWN R. PADDICK	SCALE 1:8 @ A1										
	DATE 16-May-2011			REV	AMENDMENTS	SIGNED	CHECKED	DATE	TITLE: RG-140 OCTAGON SPAN RANGE 1800 TO 2300	QUOTE N°. A1	DRAWING N°. RG-140-20 SHEET 1 OF 2	REV