


PLAN VIEW

GLAZING SPECIFICATION:
 OUTER SKIN: 4mm CLEAR TOUGHENED GLASS
 CAVITY: 16mm ARGON FILLED
 INNER SKIN: 6.4mm CLEAR LAMINATED GLASS
 WITH LOW-E COATING

DESIGN LOAD 750 N/m²

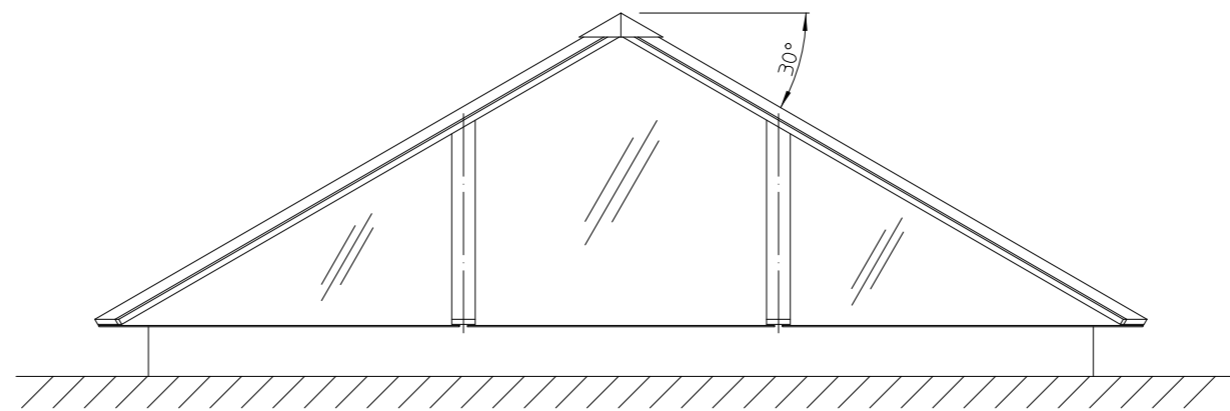

SIDE ELEVATION

THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM ROOFGLAZE LIMITED.	CHECKED	TOLERANCE UNLESS OTHERWISE STATED ±3	MATERIAL ALUMINIUM GLASS	Roofglaze Limited, Unit 4, Little End Road, Eaton Socon, St Neots, Cambs, PE19 8JH Telephone 01480 474797. Fax 01480 474774. E-mail technical@roofglaze.co.uk			ROOFGLAZE			
	DATE	DIMENSIONS IN MM	FINISH POLYESTER POWDER COATING	REV	AMENDMENTS	SIGNED		CHECKED	DATE	
	DRAWN R. PADDICK	SCALE 1:10 @ A1								
	DATE 13-Feb-2009									
TITLE: RG-40 PYRAMID SPAN RANGE 2000 TO 3000							A1	QUOTE N°	DRAWING N° RG-40-30	REV
									SHEET 1 OF 2	