DRAWING N°.
RG-50-50
SHEET 1 OF 3

IF IN DOUBT ASK DO NOT SCALE

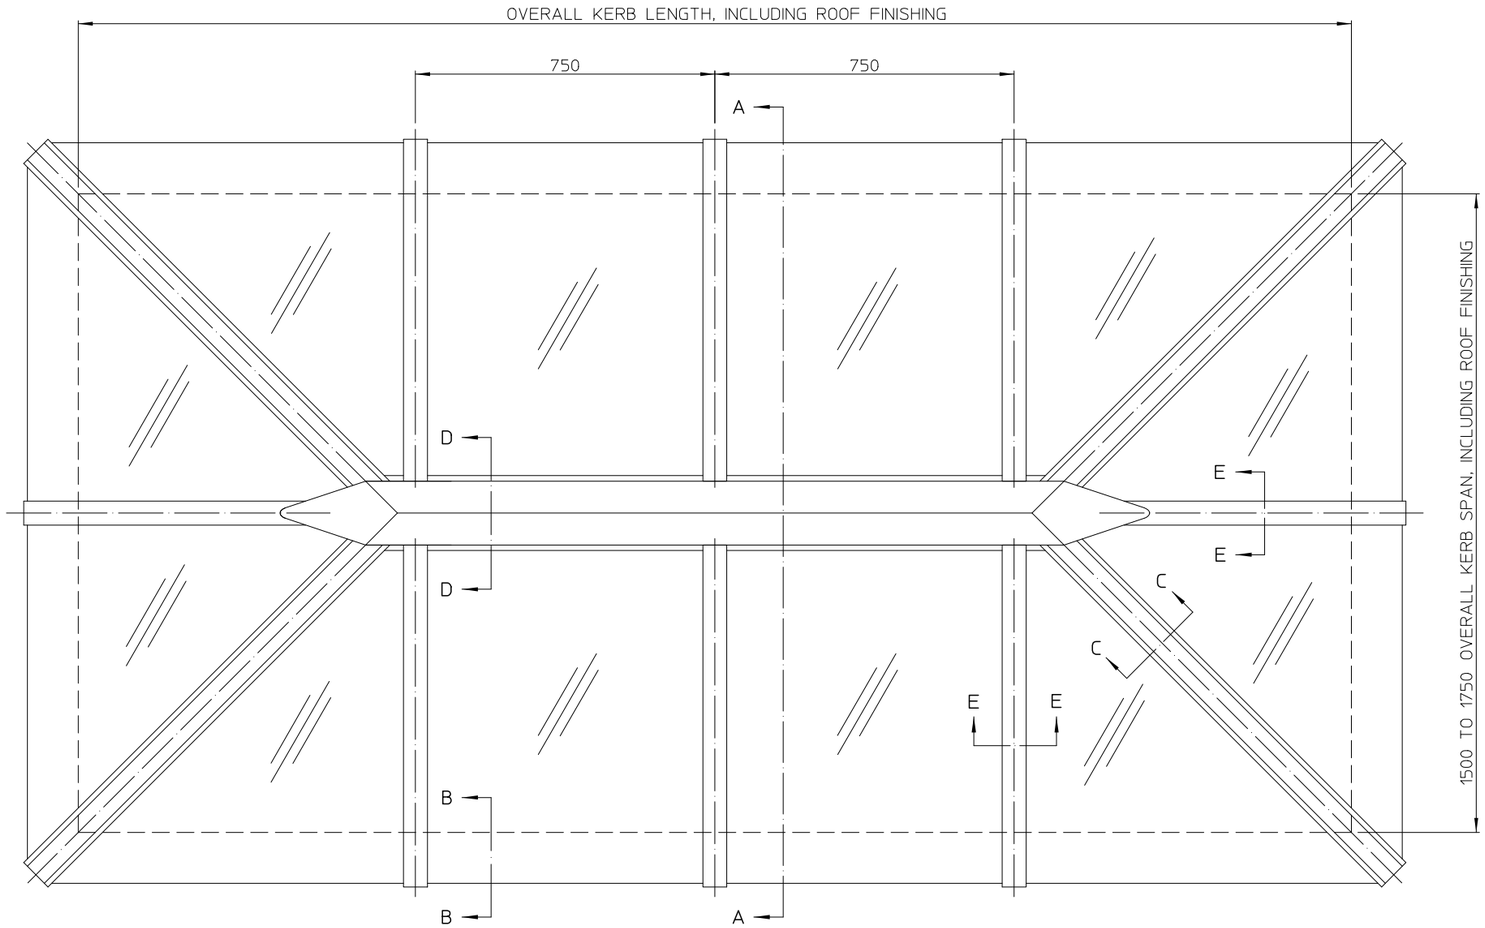

PLAN VIEW

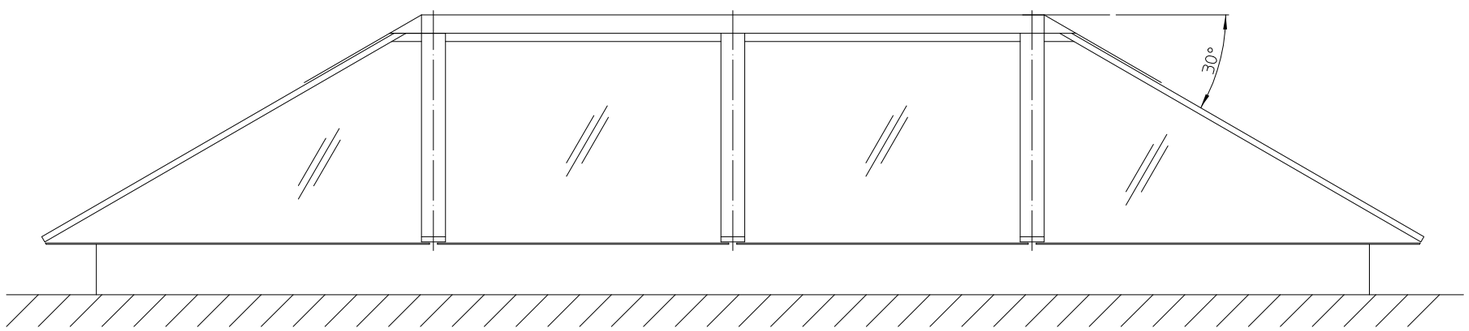

SIDE ELEVATION

GLAZING SPECIFICATION:
OUTER SKIN: 4mm CLEAR TOUGHENED GLASS
CAVITY: 16mm ARGON FILLED
INNER SKIN: 6.4mm CLEAR LAMINATED GLASS
WITH LOW-E COATING

DESIGN LOAD: 750 N/m ^{2}

SPAN RANGE 1500 TO 1750

THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM ROOFGLAZE LIMITED.

CHECKED	TOLERANCE UNLESS OTHERWISE STATED ±3	MATERIAL ALUMINIUM GLASS						
DATE	DIMENSIONS IN MM	FINISH POLYESTER POWDER COATING						
DRAWN R. PADDICK	SCALE 1:6 @ A1							
DATE 13-Feb-2009			REV	AMENDMENTS	SIGNED	CHECKED	DATE	

Roofglaze Limited.
Unit 4, Little End Road, Eaton Sucon, St Neots, Cambs. PE19 8JH
Telephone 01480 474797. Fax 01480 474774.
E-mail technical@roofglaze.co.uk

ROOFGLAZE

TITLE:		QUOTE N°.	DRAWING N°.	REV
RG-50 RIDGELIGHT HIP END	A1		RG-50-50 SHEET 1 OF 3	