

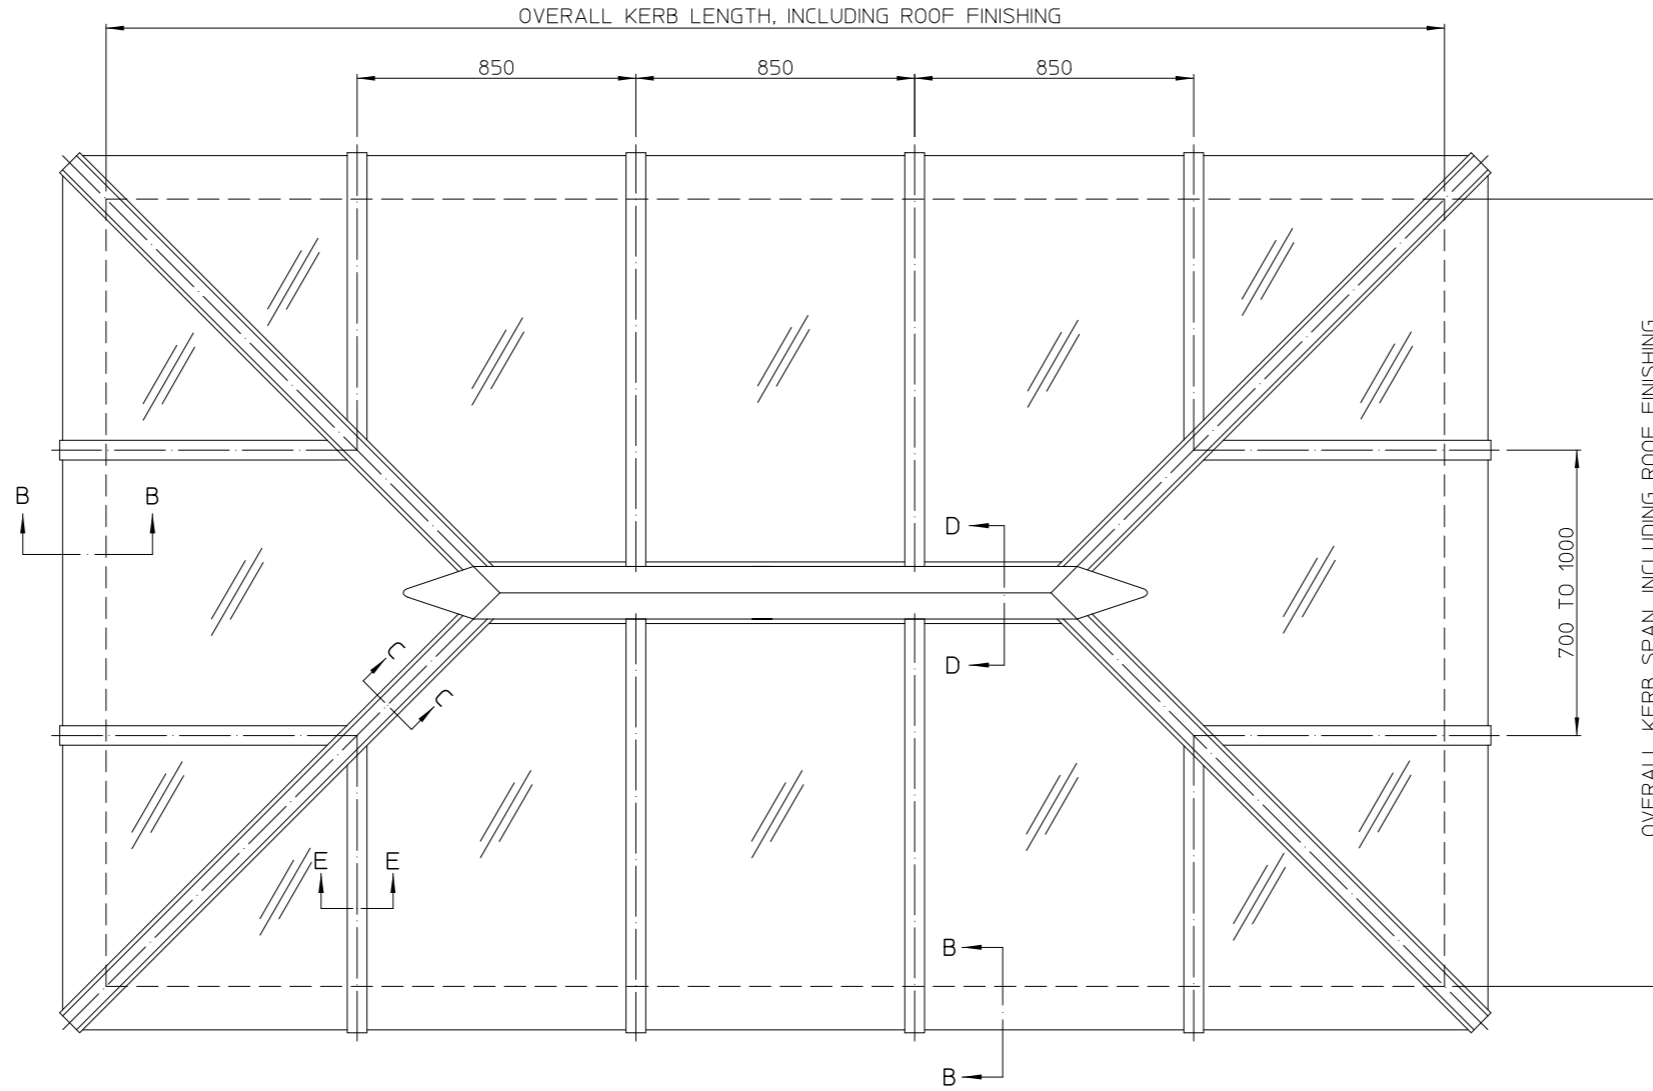



IF IN DOUBT ASK DO NOT SCALE

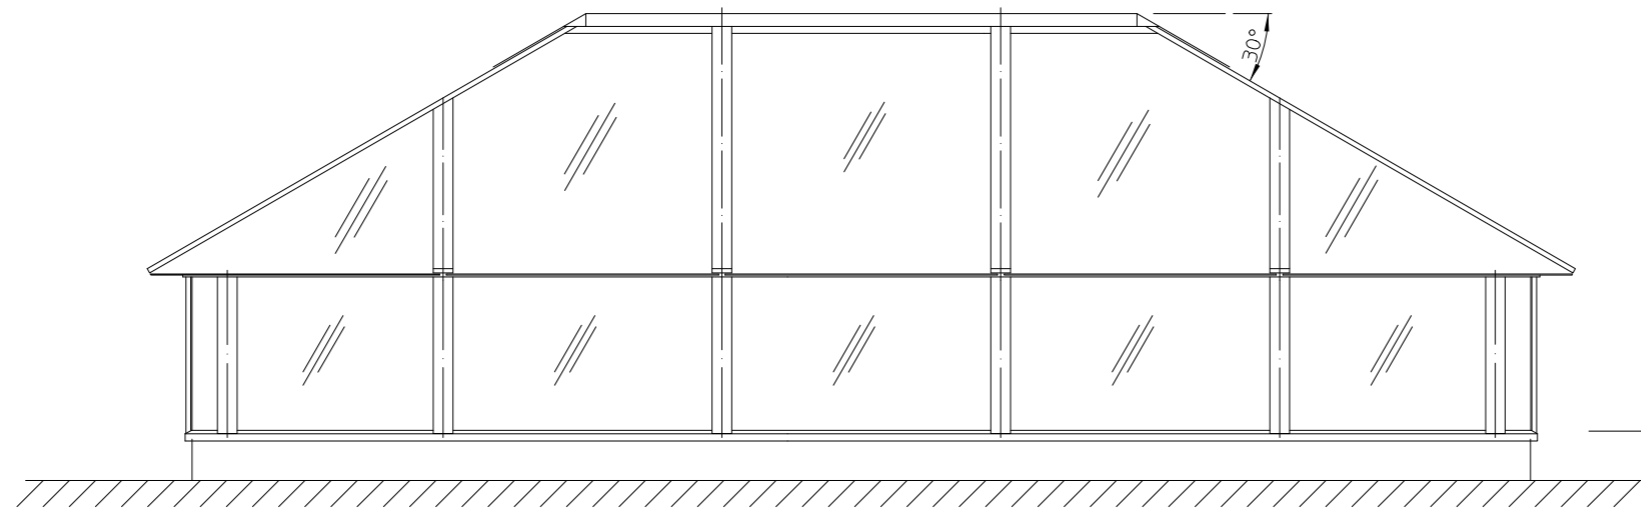

PLAN VIEW

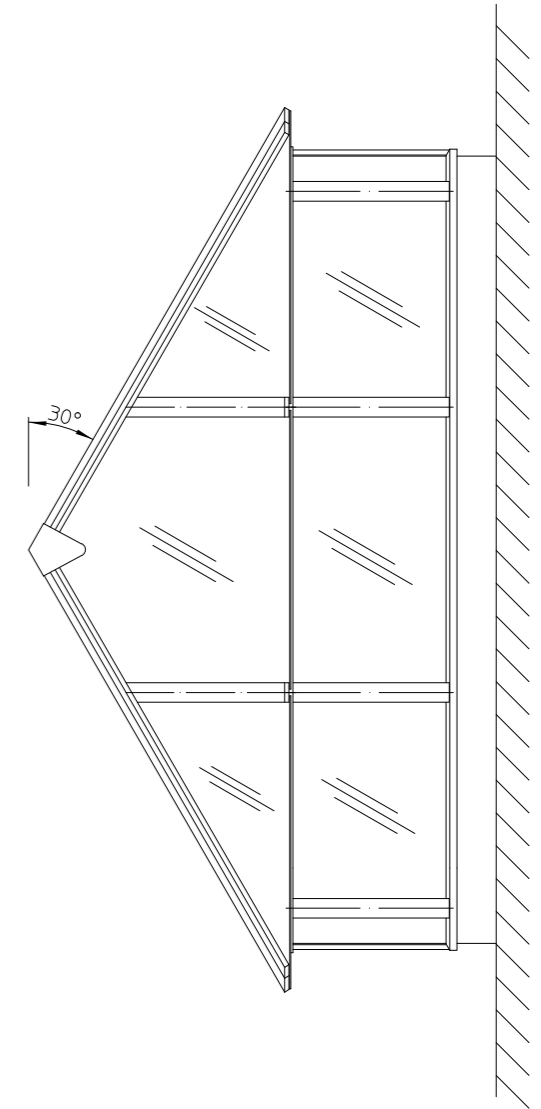

SIDE ELEVATION

GLAZING SPECIFICATION:  
 OUTER SKIN: 4mm CLEAR TOUGHENED GLASS  
 CAVITY: 16mm ARGON FILLED  
 INNER SKIN: 6.4mm CLEAR LAMINATED GLASS  
 WITH LOW-E COATING  
 LANTERN UPSTAND CAVITY: 14mm ARGON FILLED  
 STANDARD DESIGN LOAD: 750 N/M<sup>2</sup>

THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM ROOFGLAZE LIMITED.	CHECKED	TOLERANCE UNLESS OTHERWISE STATED	MATERIAL						
	DATE	±3	ALUMINIUM GLASS						
	DRAWN R. PADDICK	DIMENSIONS IN MM	FINISH POLYESTER POWDER COATING						
DATE 5-Dec-2008	SCALE 1:12 @ A1								
				REV	AMENDMENTS	SIGNED	CHECKED	DATE	

Roofglaze Limited,  
 Unit 4, Little End Road, Eaton Sucon, St Neots, Cambs, PE19 8JH  
 Telephone 01480 474797. Fax 01480 474774.  
 E-mail technical@roofglaze.co.uk

**ROOFGLAZE**

TITLE: RG-60 LANTERN LIGHT HIP ENDED RIDGELIGHT	QUOTE Nº. A1	DRAWING Nº. RG-60-101	REV
---	--------------	-----------------------	-----