


**NOTE**

CRITICAL DIMS MUST BE MAINTAINED TO RETAIN ROOFLIGHT FREE AIR OF 1m<sup>2</sup> OR OF 1.5m<sup>2</sup>.

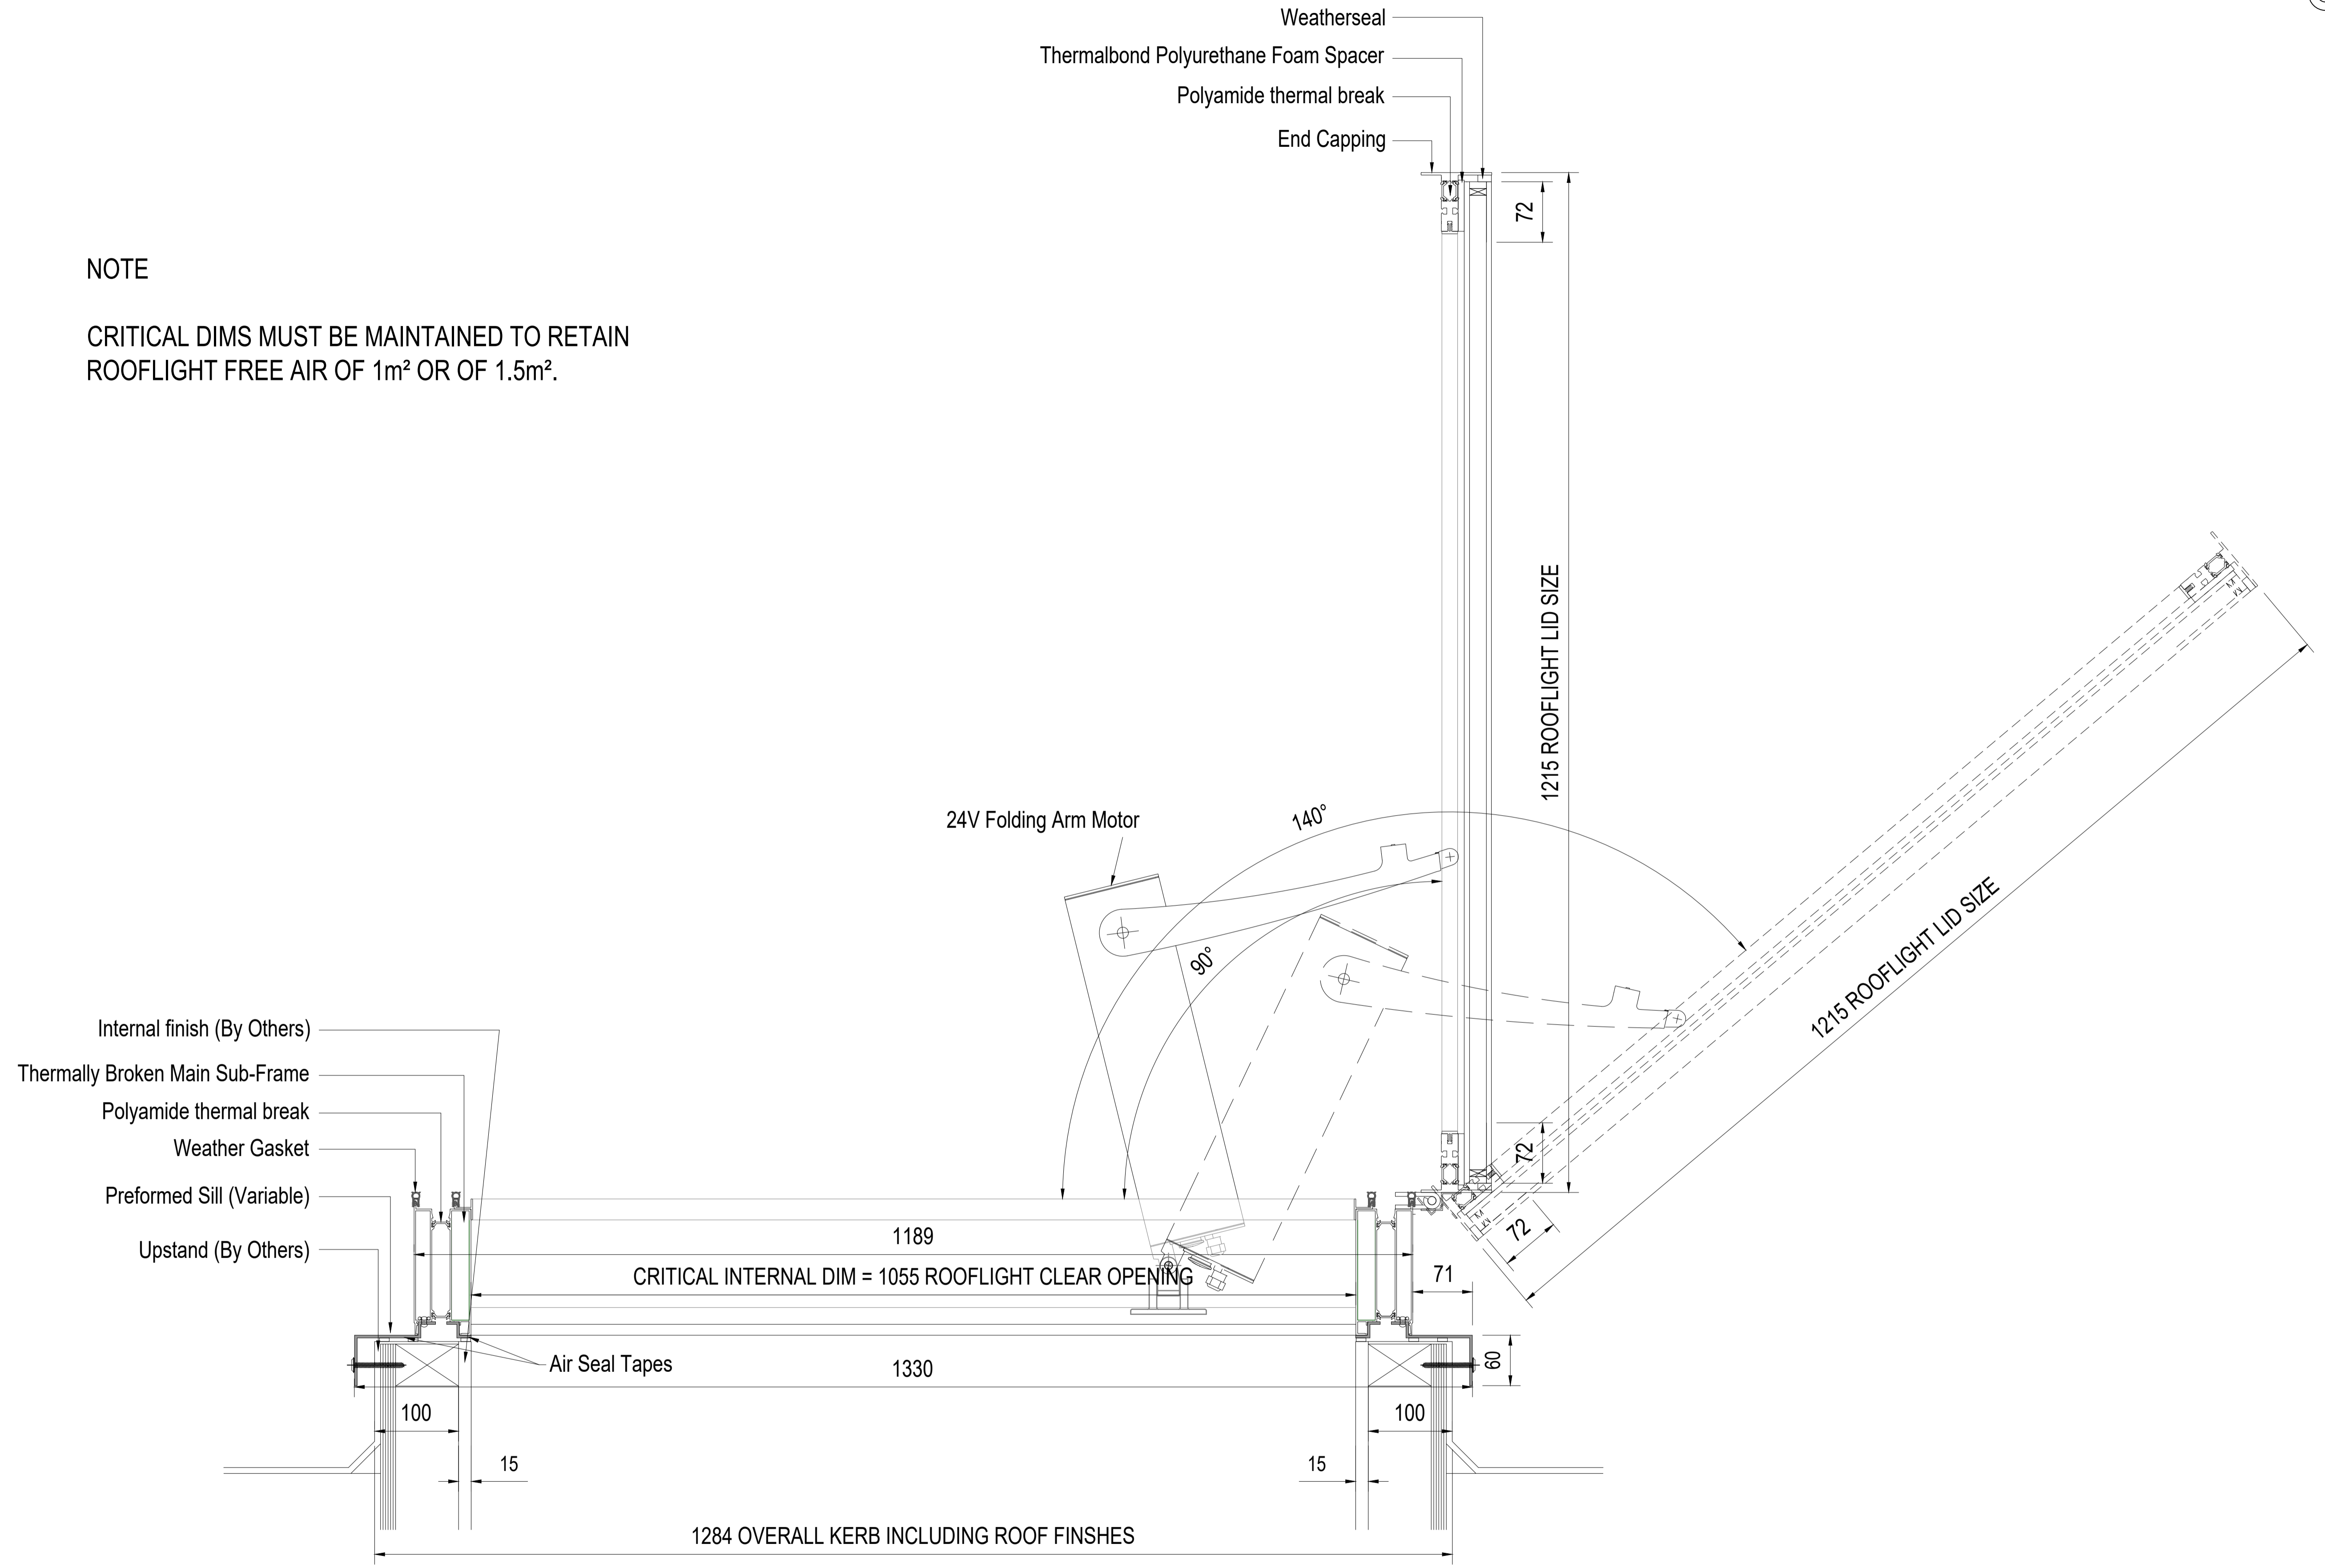

**SECTION Y-Y**

<p>IF IN DOUBT ASK DO NOT SCALE</p>	<p>IT IS THE RESPONSIBILITY OF THE KERB DESIGNER TO ENSURE THE KERB WILL BE STRUCTURALLY ADEQUATE TO HOLD THE ROOFLIGHT. KERBS SHOWN ON THESE DRAWINGS ARE FOR ILLUSTRATION PURPOSES ONLY.</p>	<p>The manufacturer would advise an installation with a minimum pitch of 5° for rooflight units to minimize water pooling. Whilst the product can be installed flat without detriment to the warranty, the manufacturer cannot be held responsible for any excessive pooling of water to the surface of the rooflight, post installation, if installed without an adequate fall. Larger units may require a greater fall. The final decision on amount of fall required must be made by the client and relayed to the installer.</p>	<p>THIS DRAWING MUST NOT BE COPIED OR PASSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT FROM THE MANUFACTURER.</p>	<p>CHECKED D. PUGH</p>	<p>TOLERANCE UNLESS OTHERWISE STATED ±5</p>	<p>MATERIAL ALUMINIUM + GLASS</p>	<p>FINISH POLYESTER POWDER COATING RAL T.B.C.</p>	<p>Roofglaze Rooflights Ltd. 11 Howard Road, Eaton Socon, St Neots, Cambs, PE19 8ET Telephone 01480 474797</p>	<p>DRAWING N°. RG-80-324-02</p>	<p>REV</p>	<p>ROOFGLAZE</p>	
				<p>DATE 20-10-2016</p>								<p>DIMENSIONS IN MM</p>
				<p>DRAWN C. MITCHELL</p>				<p>REV</p>	<p>SIGNED</p>	<p>CHECKED</p>	<p>DATE</p>	