




## SMART Enabled Wi-Fi Switch

▶ SMART control of your windows and integral Blinds

### Key Features & Benefits

- ▶ Compatible with Alexa and Google Home
- ▶ Wi-Fi APP Available for IOS and Android
- ▶ Touch Screen Wall Switch for Manual Control
- ▶ 433MHz RF remote control, very easy to pair with switch
- ▶ Can be controlled by external sensors, such as rain or wind sensors
- ▶ Can store 8 transmitter signals
- ▶ Motor Protection, cuts power off automatically after 5 minutes
- ▶ Standard 86mm type mounting box, easy to install


### Button and terminal

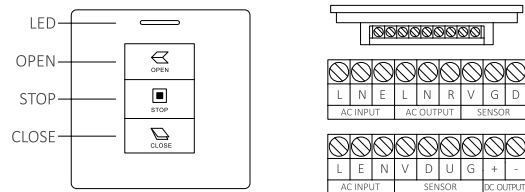

AC Input		AC Output		DC Output		Sensor	
L	Live Wire	L	Forward	+	24VDC Positive	V	12VDC+
N	Null Wire	R	Reverse	-	24VDC Negative	D	Down
E	Earth Wire	N	Neutral			U	Up
						G	Com

### Wi-Fi App Control

▶ Download Smart Life App on Google Play or Apple App Store




### Pair the controller with your mobile phone

- ▶ Power the controller on, please place your router, mobile phone and controller as close as possible
- ▶ Open Smart Life App on your phone
- ▶ Register an account with a mobile number, set a login password
- ▶ Open the main screen on the App and click 'Add Device, small home appliance, Door/Window'
- ▶ Click confirm - Indicator will rapidly blink
- ▶ Enter Wi-Fi Password
- ▶ Keep pressing STOP on the controller for 8 seconds, red LED's rapidly blink
- ▶ Click confirm to register your controller to smart cloud and initialise the controller
- ▶ When the controller is added successfully, click done.

### Control the Window/ Door via App

- ▶ Press Open, Stop or Close to control the Window/ Door
- ▶ User-Defined time to open/ Close Window/ Door
- ▶ Control by Alexa

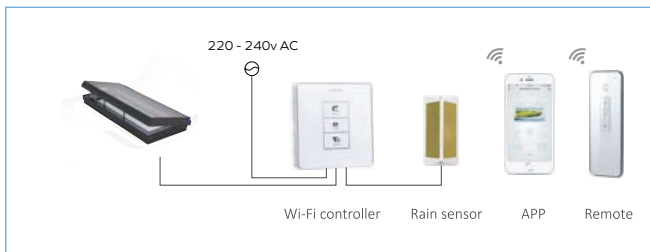



# Technical Data Sheet

V.01-2020

## RF Remote Control

### Matching Code

- ▶ Power the controller on, press STOP on the controller for 5 seconds
- ▶ Press UP on the remote within 15 seconds
- ▶ Codes are matched after LED flashes 3 times

### Clearing Single Code

- ▶ Power the controller on, press STOP on the controller for 5 seconds
- ▶ Press DOWN on the remote within 15 seconds
- ▶ Codes is cleared after LED flashes 3 times

### Clearing all Codes

- ▶ Power the controller on, press STOP and CLOSE for 5 seconds
- ▶ All the codes are deleted after LED flashes 3 Times

### Changing direction

- ▶ Power the controller on, press OPEN and CLOSE for 5 seconds
- ▶ Directions are changed after LED flashes 3 Times

### Inching Mode

- ▶ Power the controller on, press OPEN and STOP on the controller for 5 seconds
- ▶ Setting is ok after LED flashes 3 times
- ▶ Repeat the action, it turns to normal mode
- ▶ It can work continuously when pressing OPEN or CLOSE for more than 1.5 seconds

### Installation note

- ▶ Please observe the following provisions in accordance with the standard of effective power
- ▶ Do not use metal objects to touch or shade the receiver
- ▶ Transmission distance: 50 meters without obstacles, 20 meters through walls
- ▶ The installation distance between the receiver and ground, between the receiver and the ceiling is more than 1.5m, between receivers is more than 0.2m
- ▶ The main power supply must be cut off before installing the wiring
- ▶ In order to prevent electrostatic interference, must ensure that the receiver is effectively grounded
- ▶ After the installation, ensure that the receiver and cable are not effected by tension

### Troubleshooting

No	Symptom	Solution
1	LED flashes, receiver shut down	1. Check the connection of wires 2. Check the receiver setting
2	LED on the transmitter is off or weak	1. Make sure the right installation of the battery 2. Change the battery
3	The transmitter and the receiver work well, the motor does not work	1. Check the wiring of motor 2. Make sure the motor no failure

\*Please see the Roofglaze Terms & Conditions of Sale for more details

**Roofglaze**

Lighting, by nature.™

Get in touch for Technical and Estimating Advice

T: 01480 474 797 Email: [info@roofglaze.co.uk](mailto:info@roofglaze.co.uk) [www.roofglaze.co.uk](http://www.roofglaze.co.uk)

**Roofglaze**

11 Howard Road, Eaton Socon, St Neots, Cambridgeshire PE19 8ET